

Figures

**THIS PAGE BLANK (USPTO)**

10064146-061402



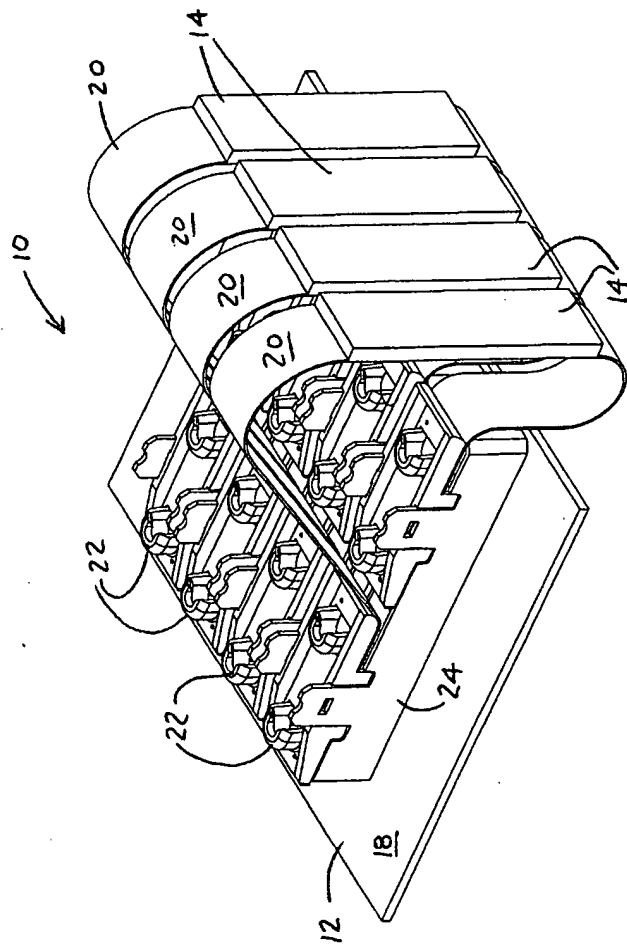


FIG. 1

Sheet 1 of 11

10064146-061402

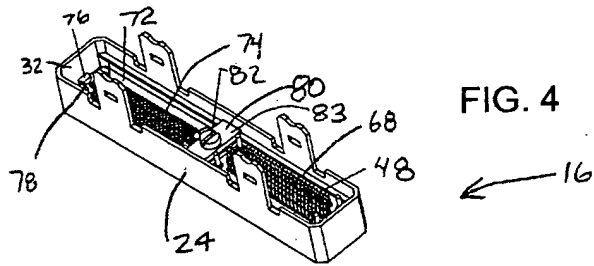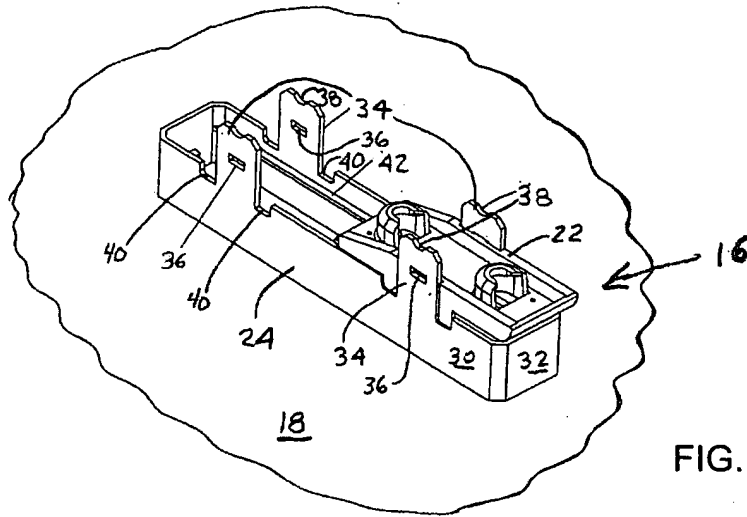

Sheet 2 of 11

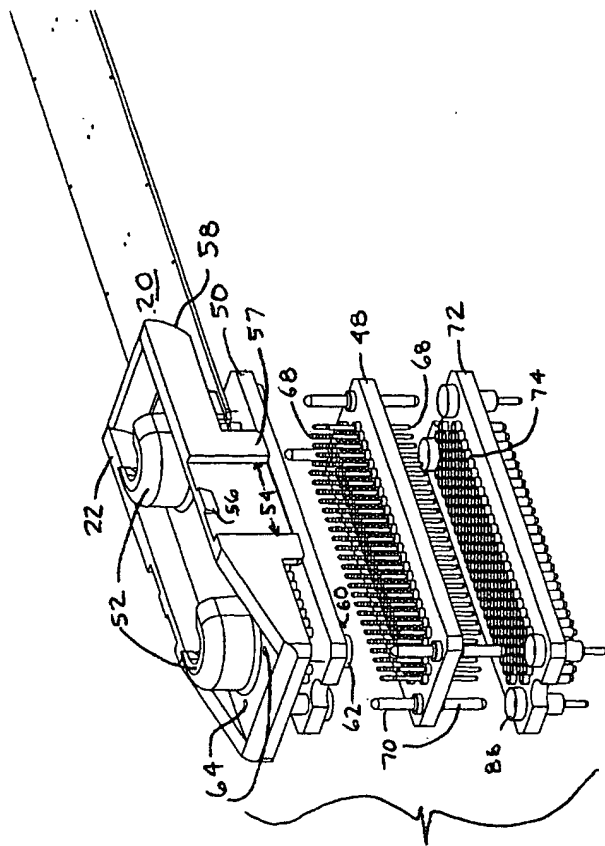


FIG. 3

Sheet 3 of 11

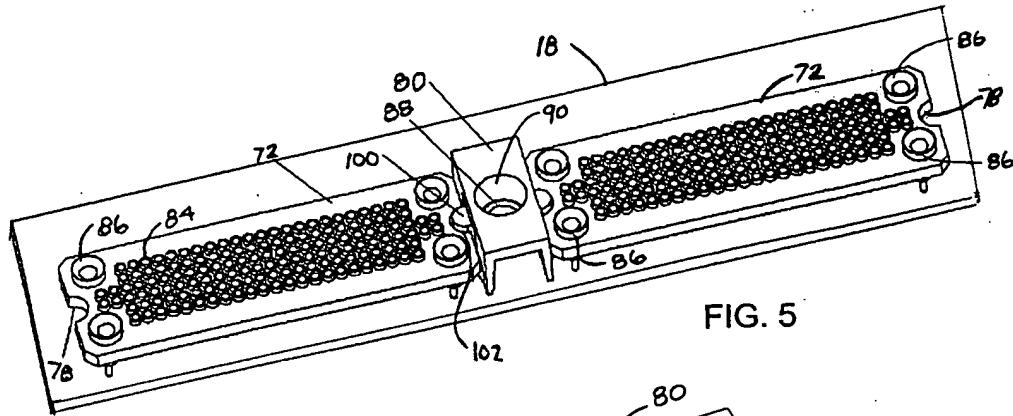


FIG. 5




FIG. 6

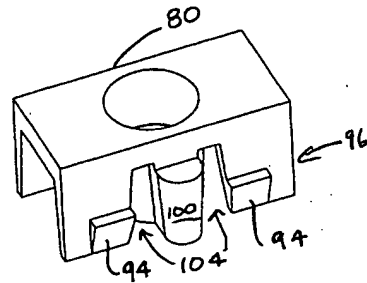


FIG. 7

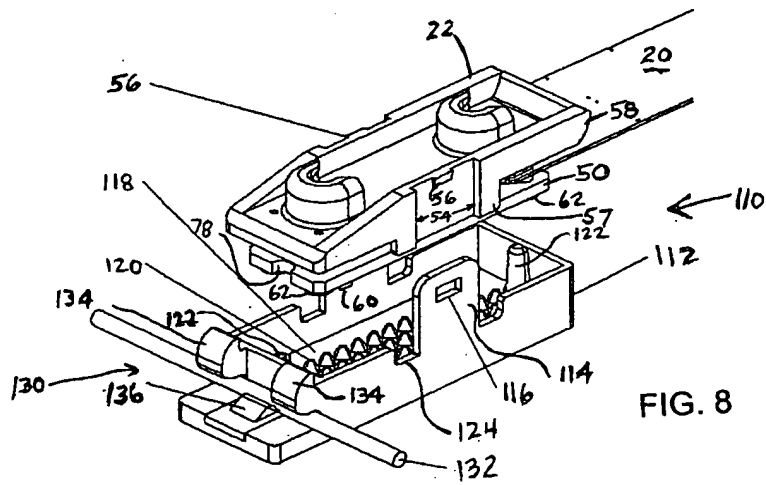


FIG. 8

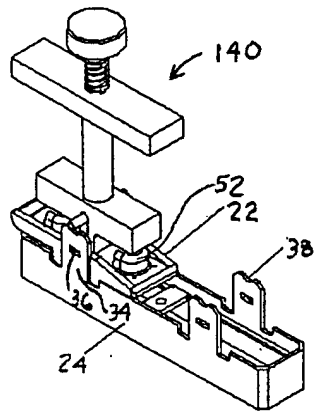


FIG. 9

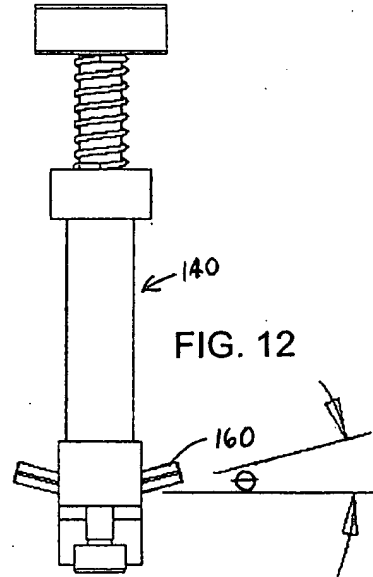


FIG. 12

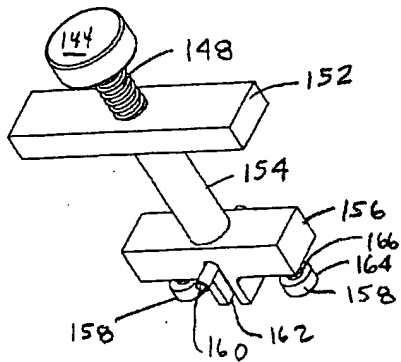


FIG. 10

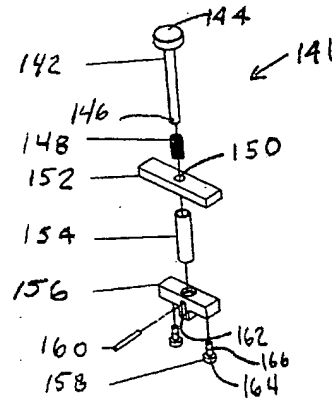


FIG. 11

Sheet 5 of 11

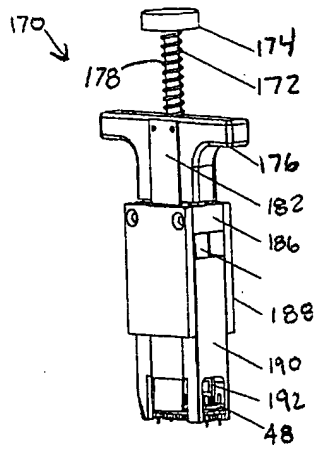


FIG. 13

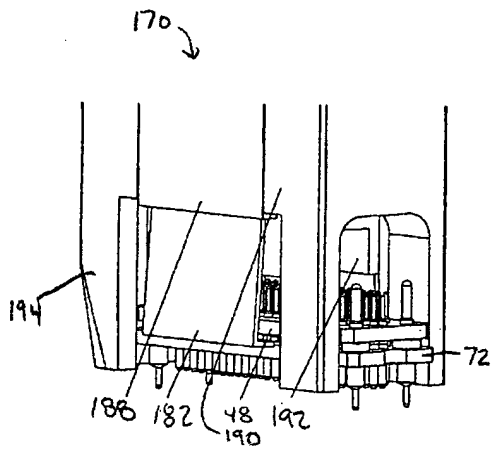


FIG. 14

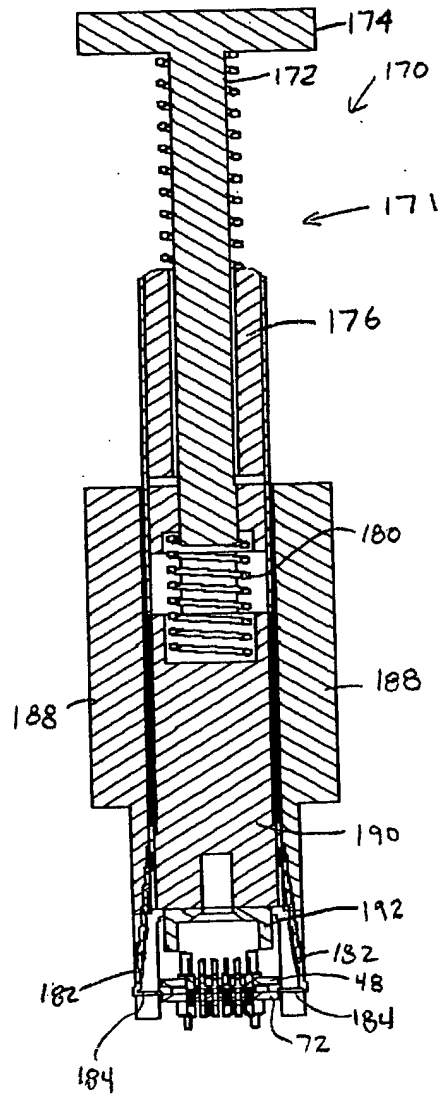


FIG. 15

Figure 170' is an exploded perspective view of a mechanical assembly. The assembly includes a top component 200, which consists of a cylindrical cap 202, a coiled spring 204, and a vertical rod 207. The rod 207 is shown passing through a rectangular block 208. Below block 208 is a vertical shaft 210. The shaft 210 is shown passing through a central opening in a larger rectangular block 212. The block 212 is flanked by two vertical plates 216. The plates 216 are shown with various mounting features, including holes and slots. A small component 226 is shown near the top of the shaft 210. The shaft 210 is shown passing through a series of components, including a block 224, a plate 222, and a block 206. The shaft 210 is shown passing through a series of components, including a block 224, a plate 222, and a block 206. The shaft 210 is shown passing through a series of components, including a block 224, a plate 222, and a block 206.

Sheet 7 of 11



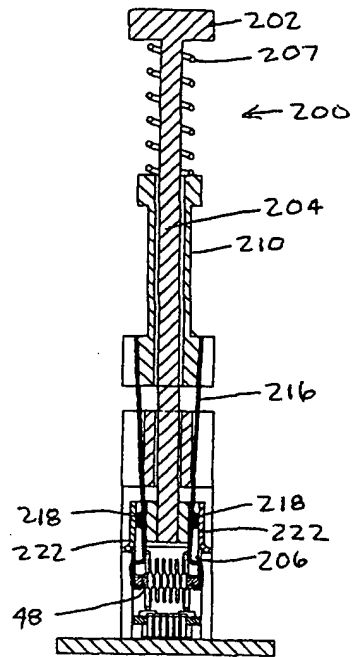


FIG. 17

Sheet 8 of 11

10064146-06102

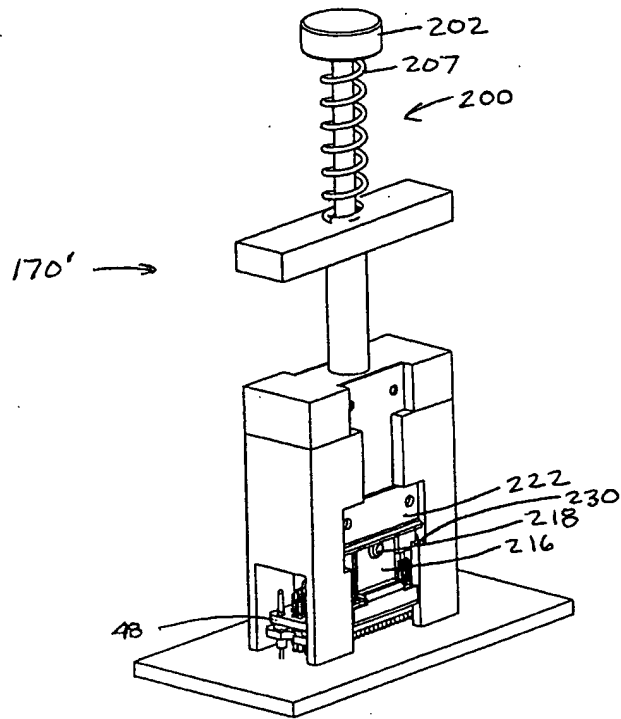


FIG. 18

Sheet 9 of 11

10064146.051402

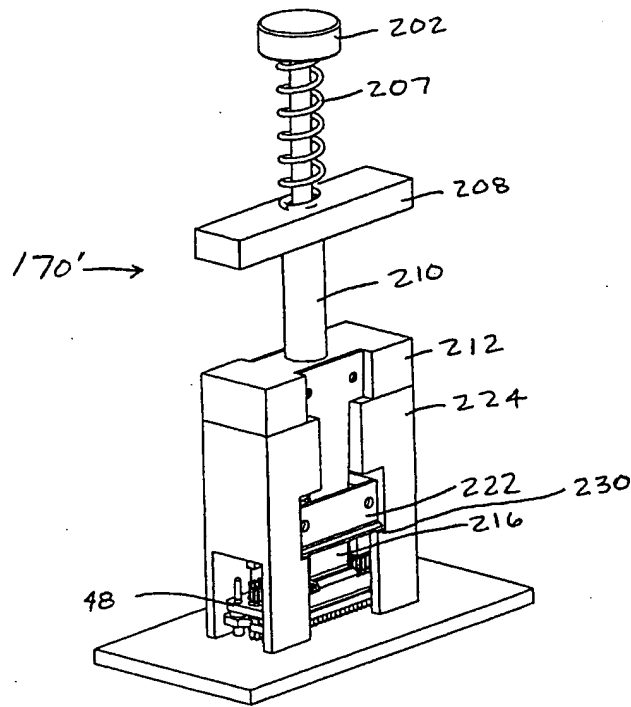


FIG. 19

Sheet 10 of 11

10064146-061402

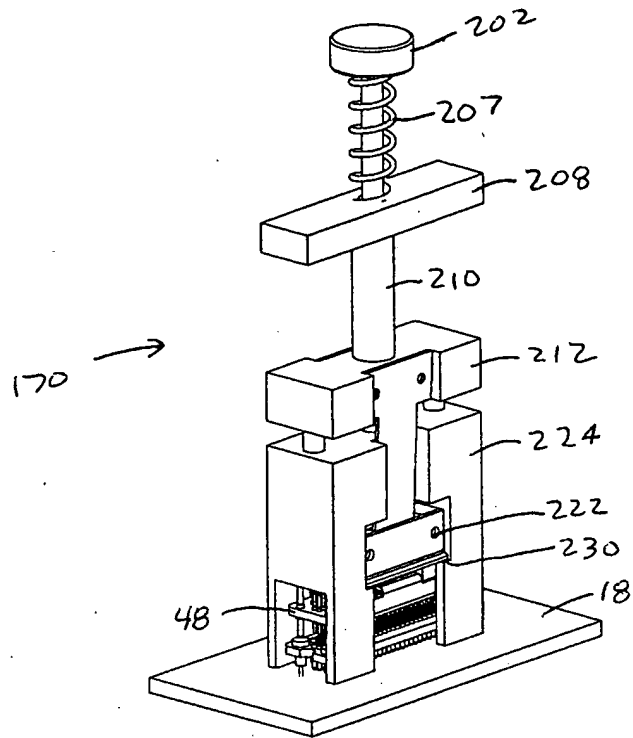


FIG. 20

Sheet 11 of 11

10064146-061402